

Jøtul F 620 B



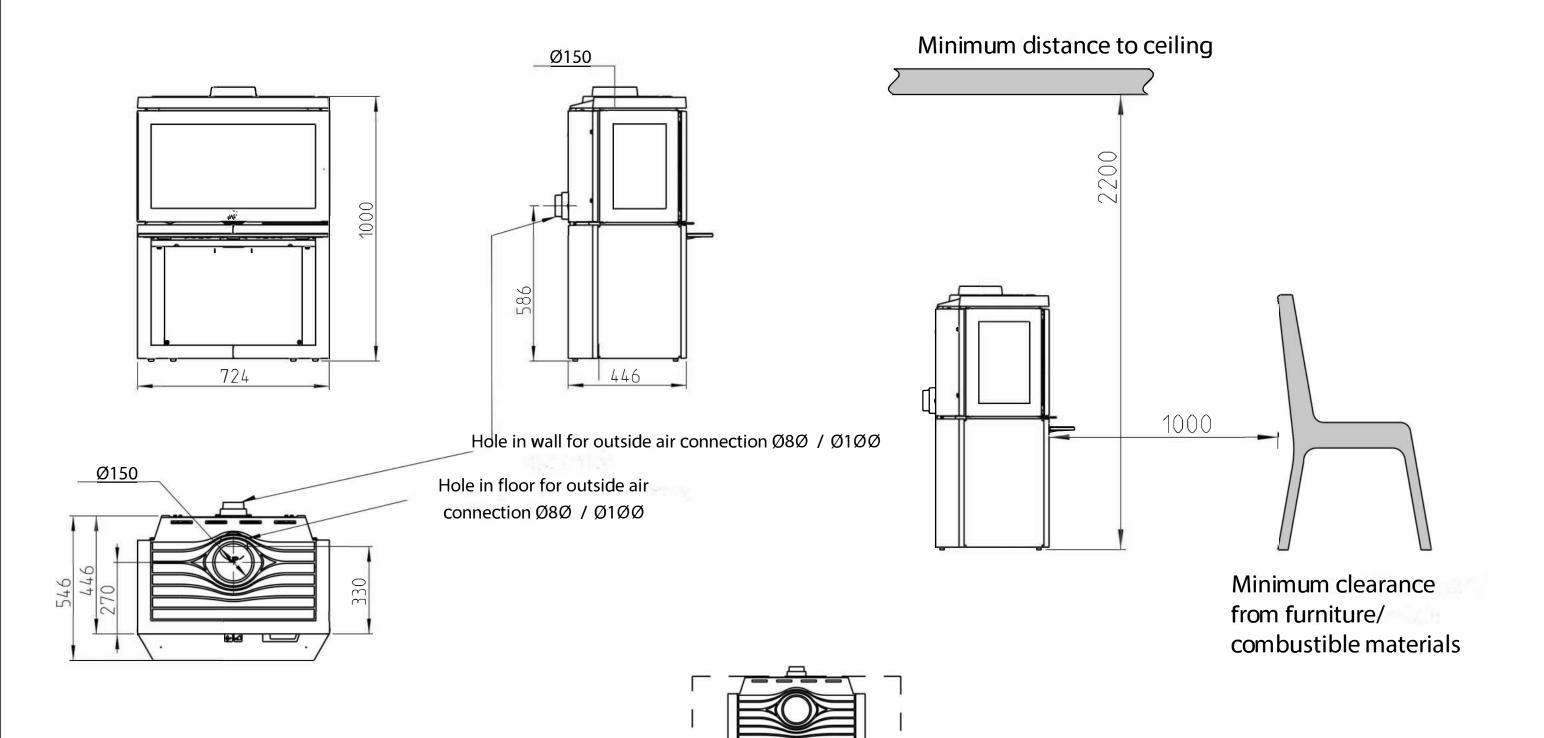


Jøtul F 620 P

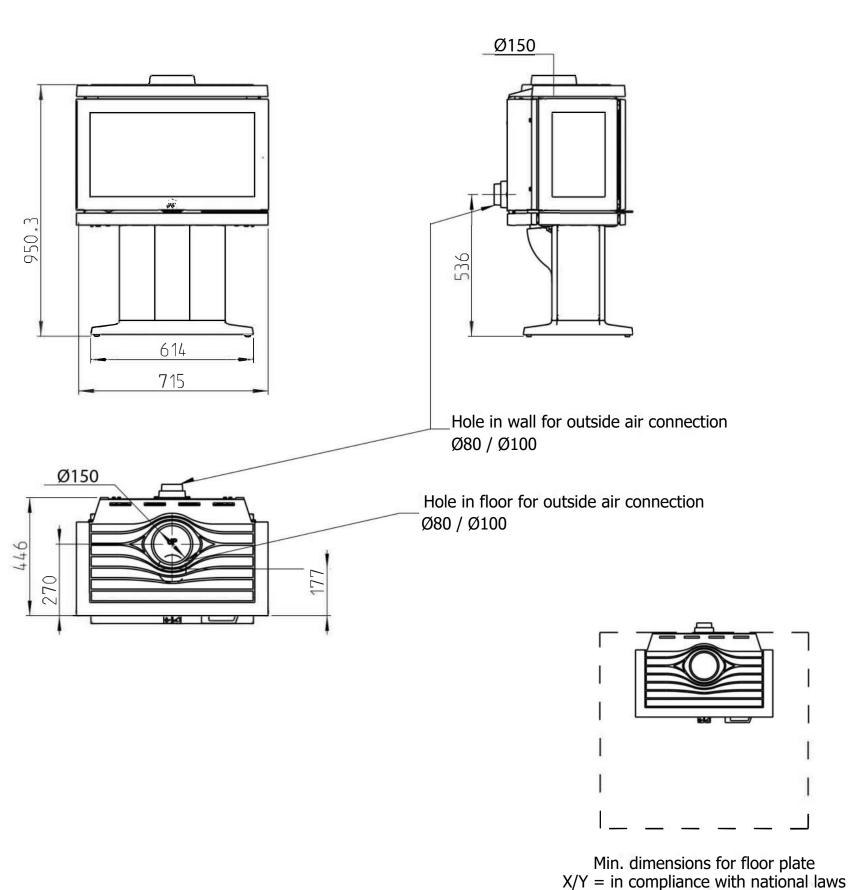


Minimum distance to ceiling 1000 Minimum clearance from

Min. dimensions for floor plate X/Y = in compliance with national laws and regulations


furniture/combustible materials

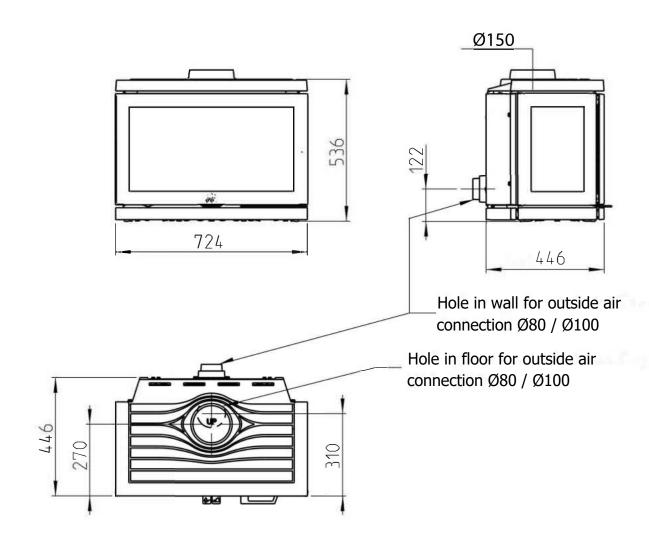




Min. dimensions for floor plate X/Y = in compliance with national laws and regulations

Minimum distance to ceiling

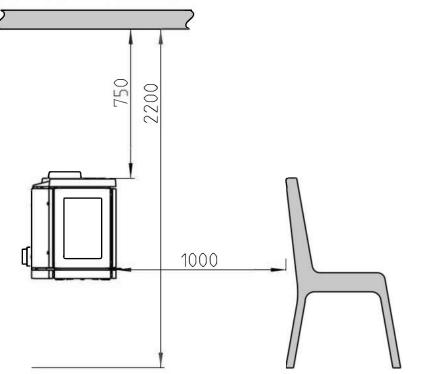


Minimum clearance from furniture/combustible materials


Min. dimensions of base

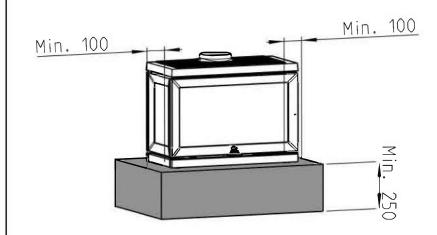

Min. dimensions of base with extended side




Min. dimensions of base

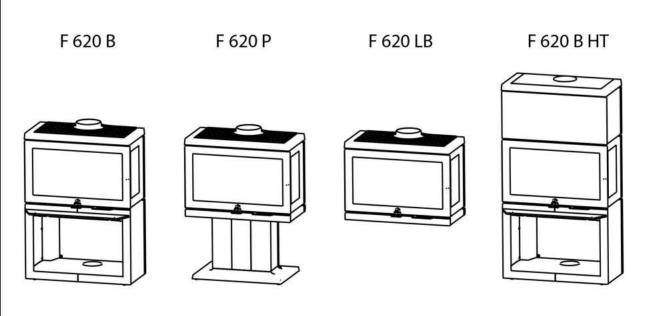

962

F 620 B / F 620 P / F 620 LB / F 620 B HT

- With retrofitted cast iron side

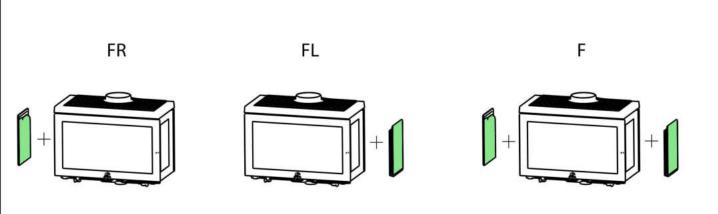

762 400 97L

F 620 B / F 620 P / F 620 LB / F 620 B HT

- With retrofitted cast iron side and convection kit sid
- With retrofitted convection kit rear

