

Titan 1060G



Model Titan 1060

A cooker with flair.

Heating, cooking, baking, frying: all possible with the Titan.

The Globe-fire Titan brings independence and cosiness into your home.

Much pleasure can be gained when cooking or heating with this stove.

There is room for several pots and pans and it also has a stainless steel oven.

As an extra accessory, a distance frame can be ordered



Depth 20 cm

Technical Information

Efficiency	: 76 %	Tested capacity	: 7 kW
Weight	: 135 Kg	Flue gas flow Wood	: 15,8 m (g/s)
Flue connection	: 120 mm	Flue gas flow coal	: 25,5 m (g/s)
Flue gas temperature Wood	: 226 °C	Pressure	: 12 p (Pa)
Flue gas temperature Coal	: 232 °C	Dust in mg.	: 31 mg/Nm ³
Capacity	: 6-8 kW		


Energy rating:



Tested according to the following standards: gem. Art. 15a B-VG, BStV München, Regensburg, Stuttgart and Aachen, gem. DIN plus, Ö-Norm, CE norm, 1.+2. BimschV. and Luftreinhalte-Verordnung Switzerland.

Titan ST1060G

Drawings, measurements
and technical information

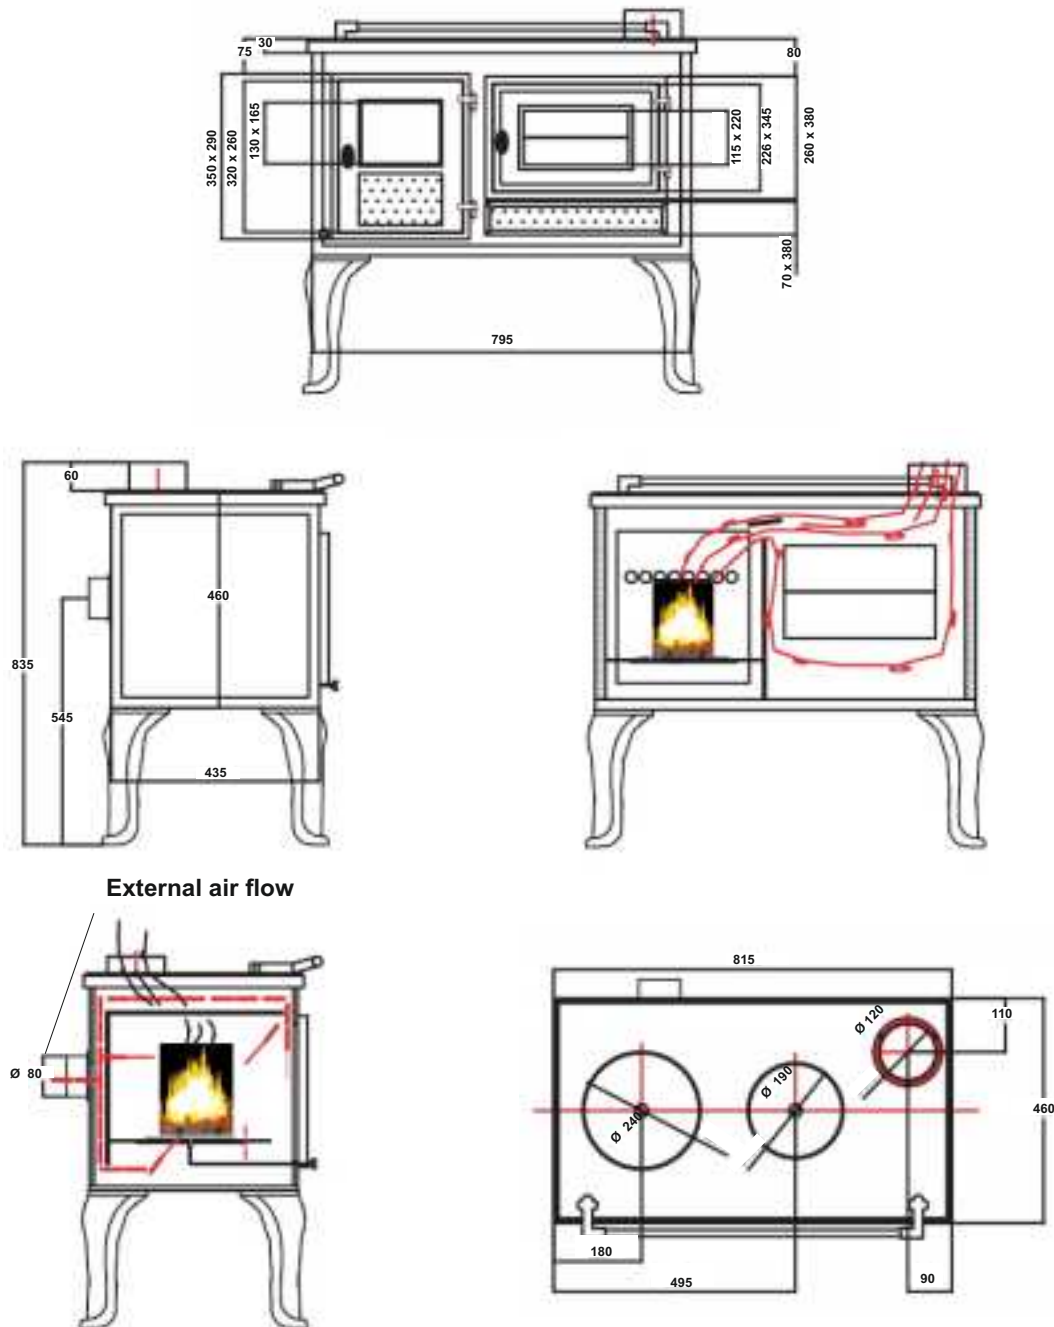

External air flow

Extra Details / Technical Information

Measurements in mm HxWxD	Fire place mm HxWxD	Oven HxWxD	Stove window HxW	Fire opening in mm HxW	Fleu height pipe		1+ 2 BimschV	Capacity in cbm		Tested according
830x810x540	250x310x345	200x300x410	125x165	195x230	780		ja	165		12815
Colour	Inside of fire	Fuel	Continuing/ Time burning	Fire rotation grip	Ash pan	Grid	Primary air	Design	O-Norm	Clean air act Switzerland
Black	Cast Iron	Wood/coal	Continuing burning	yes	yes	yes	yes	A1	yes	yes
Dust in Mg on 13% O2: 31mg/Nm³		NOX: 170 mg/Nm³	CO: 1000 mg/Nm³	OGC: 75mg/Nm³	Anf. der Städte München, Aachen Stuttgart und Regensburg nach DIN plus				yes	
Values converted:	19 mg/MJ	107 mg/MJ	625 mg/MJ	47 mg/MJ						

- Globe fire -

Globefire Ch.Leibfried GmbH, An der Bundesstraße 2,
D-49733 Haren / Ems, Germany

Tested oven Type 1: EN 13240: 2001+ A1:2004/AC: 2007

Type	Titan ST 1060		
Declaration of performance Nr.	001-CPR-2013.06.10		
Test institute Number	1625		
Test-Nr.	RRF - 15071505		
Heat output / Energy efficiency	Fulfilled		
.Efficiency	80,2 %		
.Nominal heat output	7 kW		
.Room efficiency	7 kW		
.Heat output	6 - 8 kW		
Mechanic solidity	Fulfilled		
Surface temperature	Fulfilled		
Combustion products	CO-Emission: 1000 mg/Nm ³ - 625 mg/MJ		
.Flue gas temperature	226 °C		
Fire safety	Fulfilled		
.Fire behavior	A1		
.Minimal distance to flammable materials:	Side: 20 cm Rear: 20 cm Bottom: 0 cm Front stove window: 80 cm		
Fuel	Wood and coal Time burning		
Dust in Mg on 13% O ₂ : 31 mg/Nm ³	Nox: 170mg/Nm ³	CO: 000 mg/Nm ³	OGC:75 mg/Nm ³
Values (converted): 19 mg/MJ	107 mg/MJ	625 mg/MJ	47 mg/MJ
VKF Switzerland	25279		

Reading and follow up of given guidelines in the manuel

The connection of more stoves to one chimney is permitted



Approved German tests and CE mark EN 13240:2001/A1 2004/AC:2007, according DINplus and also according Art. 15A B-VG Ö-Norm Austria.
1. and 2. level 1. BimschV Germany and also Luftreinhalte-Verordnung Switzerland.